

# MigMatic® 300iP

## Synergic Pulsed Compact MIG System

Issued July 2020 • Index No. DCM/60.11 UK

**MIG/MAG (CV)**  
Welding System 

### Quick Specs



**Industrial Applications**  
General fabrication  
Car repair  
Training schools  
Agricultural equipment  
Repair and maintenance

**Processes**  
MIG/MAG (GMAW)  
Pulsed MIG (GMAW-P)  
Double Pulsed MIG  
Flux-cored (FCAW)

**Input Power** 400 V, 3 phases (50/60 Hz)  
**Welding Output** 300 A, 29 V at 40% duty cycle  
**Max. Output Amperage** 330 A  
**Output Range** 15 A – 300 A  
**Net Weight** 57 kg

### Performance / Durability / Ease of use

**NEW!**

Miller MigMatic® 300iP Synergic Pulsed MIG/MAG System featuring a heavy duty drive mechanism capable of consistent and precise wire feeding regardless of your choice of wire. The Pulse MIG/MAG welding capability makes the system ideal for aluminium applications and for thin plate mild and stainless steel welding. The user interface is extremely easy to use and never before has it been so quick and straight forward to achieve excellent welding performance.

#### Trigger program switch

Re-call up to 4 preset programs from the torch trigger (any standard MIG torch) for increased productivity on complex objects.

#### Miller robustness

Tested and approved for heavy duty welding under the toughest conditions. Miller goes to extreme measures to ensure trouble free welding in any environment.

#### Heavy duty wire drive mechanism

The 4-roll drive system will ensure trouble free wire feeding.

#### Energy efficient

The energy saving Fan-On-Demand™ power source cooling system operates only when needed, reducing noise and the amount of contaminants pulled through the machine.

#### Full synergic Pulse with presets

Synergic lines for all common wire/gas combinations with presets of start/stop parameters for optimal welds.



#### Ease of use and versatility

Large intuitive LCD panel for quick and precise setting of advanced weld parameters.



Easy to use

#### Versatility

- Compatible with Push/Pull torches (optional accessory kit).
- Integrated wheels and shelf for a single gas cylinder.
- Compatible with On-torch control of wire feed speed and voltage (available in Q4-2020).

**TRUE BLUE**  
3YR. WARRANTY

Warranted for three years, parts and labour.

**ITW** WELDING



**International Headquarters**  
**Miller Electric Mfg. LLC**  
An Illinois Tool Works Company  
1635 W. Spencer Street  
Appleton, WI 54914 USA

MillerWelds.com

**ITW Welding Products BV**  
Edisonstraat 10  
P.O. Box 1551  
NL-3261 LD Oud-Beijerland  
The Netherlands  
Tel.: +31 186 641 444  
info@itw-welding.com  
ITWwelding.com

**UK sales office**  
Tel.: +44 1695 58 59 11


## Advanced weld settings made easy

The machine is ready for advanced manual, Pulsed or Double Pulsed welding in seconds.

Step 1: Select your process




Step 2: Select your base material

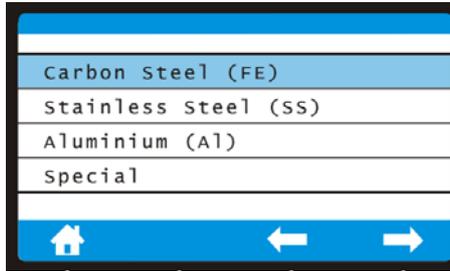

Step 3: Select your gas mixture



Step 4: Select your wire diameter

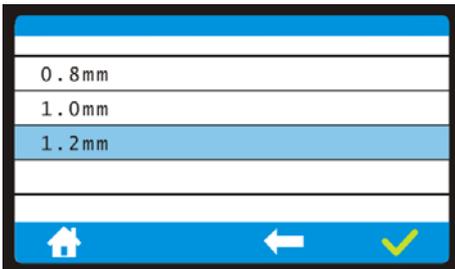

Result: Ready to weld



## MigMatic® user interface – clean, crisp and easy to use

The MigMatic® system provides a full set of features and settings at your fingertips – ease of use without compromise.

Four different trigger options:

- 2T
- 4T
- Miller 4TS
- Stitch



### 1. Weld processes:

- Manual MIG/MAG
- Synergic
- Synergic Pulse
- Synergic Double Pulse


### 2. Adjustment of parameters:

- Pre/post gas
- Run-in speed
- Crater fill
- Burnback
- Inductance

### 3. Store, modify and recall programs:

- A total of 8 programs available
- The first 4 recalled using the torch trigger

### 4. System settings and factory reset

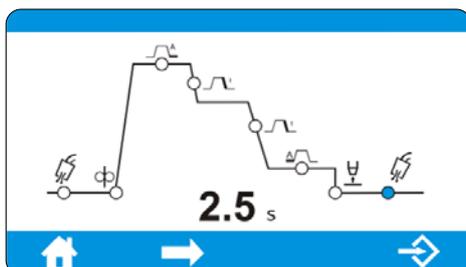

**Miller 4TS trigger functionality –**  
Gives access to hot start or cold start from the torch trigger

## MigMatic® 300iP components



**MigMatic® 300iP** is equipped with a 4-roll wire drive system (2 driven and 2 idle). The rolls are reversible offering flexibility between two different wire sizes. For soft wires, an all-drive system can be supplied as optional extra.

**MigMatic® 300iP** features a remote control receptacle for adjustment of wire feed speed and volts at the point of weld.

**MigMatic® 300iP** has integrated wheels and conveniently positioned handles, making the machine easy to move and transport. There is also an integrated shelf for the gas cylinder.

## Specifications (Subject to change without notice.)



### MigMatic® 300iP

Input Power	Voltage Range in CV	Amp Range DC	Wire Feed Speed	Rated Output @ 40°C	IP Rating	Max. Open Circuit Voltage	Dimensions H/W/D	Weight
400 VAC, 3 ph (50/60 Hz)	13 - 35 V	15 - 300 A	1.5 - 20 m/min	300 A / 29 V @ 40% duty cycle	IP23S	70 VDC	830 / 470 / 1070 mm	57 kg

### Drive Rolls and Wire Guides\* (two driven)

Wire Size	“V” Groove Drive Roll for Hard Wire	“U” Groove Drive Roll for Soft Wire or Soft-Shelled Cored Wires	“V” Knurled Drive Roll for Hard-Shelled Cored Wires
0.8 / 1.0 mm	156053126	156053127	—
1.0 / 1.2 mm	156053125	156053128	—
1.6 / 2.4 mm	—	156053129	—

\* Kits including a set of double groove drive rolls and wire guides.

### Drive Rolls and Wire Guides\* (four driven)

Wire Size	“V” Groove Drive Roll for Hard Wire	“U” Groove Drive Roll for Soft Wire or Soft-Shelled Cored Wires	“V” Knurled Drive Roll for Hard-Shelled Cored Wires
1.0 mm	—	058066145	—
1.2 mm	—	058066146	—

\* Kits including a set of single groove drive rolls and wire guides.

## Ordering Information

System Component	Stock No.	Description	Qty.	Price
MigMatic® 300iP	<b>059015052</b>	400 VAC, 3 ph (50/60 Hz) equipped with mains cable 3 m Fitted with Euro connector and 1.0 - 1.2 mm "V" groove drive rolls		
<b>Accessories</b>				
Push/Pull configuration kit	<b>057084226</b>	For installation in the power source to synchronize the drive motors		
Bernard™ Q300, air cooled Mig Gun, 4.5 m	<b>Q3015TE3EEQ</b>			

Date:

Total Quoted Price:

Miller recommends *Elega* consumables

Distributed by:

